

STACK TUMBLE DRYERS

DX
RANGE

DX13/13 **DX20/20**

2X13KG
2X30LB

2X20KG
2X45LB



FEATURES

Double capacity on the same footprint
Controls:


- Dual Digital Control or OPL Micro
- Coin operated version: XQ-Control
- Gas or Electrical heating (DX13/13)
- Large door opening for easy loading and unloading (DX 13/13 Ø 57cm, DX 20/20 Ø 68cm)
- Galvanized drum
- Axial airflow
- Large lint filter

OPTIONS

- Stainless steel drum
- Stainless steel front panel with black painted door
- Coin operated version
- Residual moisture control Sensodry+® (only with Full OPL Micro):
- lower energy and utility costs
- lower linen replacement costs
- SafeTech™ Fire Suppression System
- Reversing drum



SUITABLE FOR
LAUNDROMATS




STACKABLE
UNIT




EASY
OPERATION

| TYPE | | DX13/13 | DX20/20 |
|----------------------------------|--------|--|----------------|
| CAPACITY | | | |
| Capacity | kg | 2x13 | 2x20 |
| Drum volume | l | 2x300 | 2x420 |
| Drum diameter | mm | Ø 762 | Ø 838 |
| AIRFLOW | | | |
| Airflow | l/s | 380 | 570 |
| DRYING AVERAGE | | | |
| Gas heating | g/min | 294 | 385 |
| Electric heating | g/min | 258 | - |
| MOTOR | | | |
| Fan | kW | 2x0,4 | 2x0,4 |
| Drive | kW | 2x0,2 | 2x0,4 |
| GAS HEATING | | | |
| Energy (per pocket) | kW | 21,4 | 27,8 |
| Energy (per pocket) | kBTU/h | 73 | 95 |
| Electrical connection | | 1x100-120V/50-60Hz, 1-3x200-240V/50-60 Hz 3x440-480V/50-60Hz, 3x380-415V/50-60Hz | |
| Gas connection (one manifold) | NPT | ½" | ½" |
| ELECTRICAL HEATING | | | |
| Energy (per pocket) | kW | 21 | - |
| Electrical connection | | 3x200-208V/50-60Hz, 3x230-240V/50-60Hz 3x380V/50-60Hz, 3x400-415V/50-60Hz 3x440V/50-60Hz, 3x460-480V/50-60Hz | |
| EXHAUST | Ø /mm | 1x200 | 1x250 |
| DIMENSIONS | | | |
| Size HxWxD | mm | 1940x800x1090 | 2065x875x1235 |
| Net weight (E, G, S) | kg | 300, 260, 275 | -, 320, - |
| TRANSPORT DATA | | | |
| Packed (foil) HxWxD | mm | 2030x830x1190 | 2160x900x1370 |
| Gross weight (foil E, G, S) | kg | 300, 270, 290 | -, 340, - |
| Packed (crate) HxWxD | mm | 2210x900x1270 | 2210x1020x1520 |
| Gross weight (crate E, G, S) | kg | 360, 330, 350 | -, 420, - |

Side DX 13/13 20/20

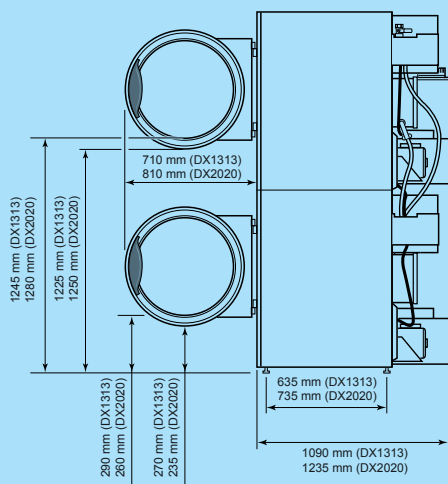

Back DX 13/13 20/20

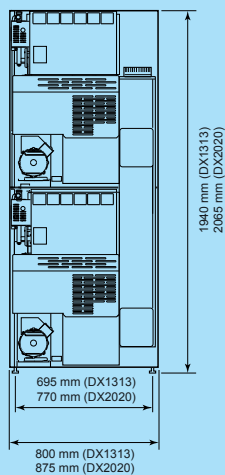

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems

